

Modular Acoustic Enclosures

200 – 275 kVA Range

The YelloGen sound attenuated enclosures accompanying the Perkins 1300 Series-powered generating set range are the result of continuing research and development by our specialist acoustic engineers.

The CAE enclosure (available on 200 – 275 kVA products) is designed for operation in regions where compliance with EU noise legislation does not apply.

Alternatively, the CAEU enclosure (available on 200–275kVA products only) reduces sound levels to comply with the stage



2 levels of the European Community Directive 2000/14/EC which became effective 3 January 2006.

Fully weatherproof, both enclosures incorporate internally mounted exhaust silencers and an extremely rugged construction means both will withstand the rough handling common on many construction sites. They are designed on modular principles with many interchangeable components permitting on-site repair.

Robust/Highly Corrosion Resistant Construction

- Stainless steel locks and hinges
- Zinc plated or stainless steel fasteners
- Body made from steel components treated with polyester powder coating

Excellent Access for Maintenance

- Two large doors on each side
- Radiator fill access plate
- Lube oil and cooling water drains piped to exterior of the enclosure

Transportability

- Tested and certified single point lifting facility
- Lifting points on baseframe

Security and Safety

- Control panel viewing window in a lockable access door
- Emergency stop push button (red) mounted on enclosure exterior
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors
- Exhaust silencing system totally enclosed for operator safety


Optional Features

- Oil field type skid with dragging points and fork lift truck pockets

Sound Pressure Levels (dBA) for 200 – 275 kVA CAE Enclosure

	50 Hz						60 Hz						
	15 m (50 ft)		7 m (23 ft)		1 m (3 ft)		15 m (50 ft)		7 m (23 ft)		1 m (3 ft)		
Generating Set Model	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	
YGP200H2	64.6	64.9	70.6	70.9	82.6	82.7	66.9	67.5	72.9	73.5	86.4	86.7	
YGP220HE2	64.7	65.1	70.7	71.1	82.7	82.8	67.1	67.9	73.1	73.9	86.5	86.9	
YGP230H2	64.8	65.1	70.8	71.1	82.7	82.8	67.0	67.8	73.0	73.8	86.5	86.8	
YGP250HE2	64.9	65.2	70.9	71.2	82.7	82.8	67.2	68.2	73.2	74.2	86.6	87.0	
YGP250H2	64.9	65.2	70.9	71.2	82.7	82.8	-	-	-	-	-	-	
YGP275HE2	65.0	65.4	71.0	71.4	82.7	82.9	-	-	-	-	-	-	
YGP220H-2	Prime	64.6	64.9	70.6	70.9	82.6	82.7	66.9	67.5	72.9	73.5	86.4	86.7
	Standby	64.7	65.1	70.7	71.1	82.7	82.8	67.1	67.9	73.1	73.9	86.5	86.9
YGP250H-2	Prime	64.8	65.1	70.8	71.1	82.7	82.8	67.7	68.3	73.7	74.3	87.7	88.0
	Standby	64.9	65.2	70.9	71.2	82.7	82.8	67.8	68.6	73.8	74.6	87.7	88.1
YGP275H-2	Prime	64.1	64.2	70.1	70.2	83.6	83.5	-	-	-	-	-	
	Standby	64.1	64.3	70.1	70.3	83.6	83.4	-	-	-	-	-	

Levels in accordance with European Noise Directive (2000/14/EC).

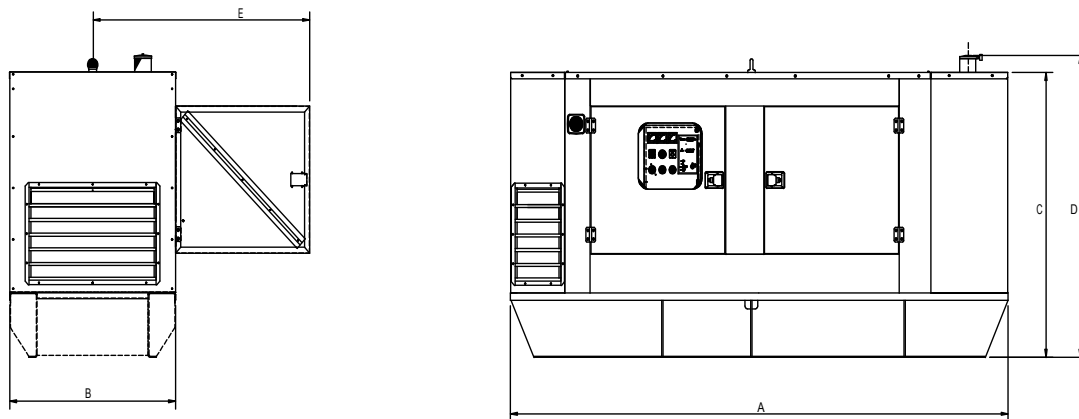

Dimensions and Weights for 200 – 275 kVA CAE Enclosure


Generating Set Model	A: mm (in)	B: mm (in)	C: mm (in)	D: mm (in)	*E: mm (in)	Weight: kg (lb)	Fuel Capacity: l (US gal)
YGP200H2/P220HE2	3894 (153.3)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	2944 (6490)	550 (145)
YGP230H2/P250HE2	3894 (153.3)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3029 (6678)	550 (145)
YGP250H2/P275HE2	3894 (153.3)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3094 (6821)	550 (145)
YGP220H-2	3894 (153.3)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	2879 (6347)	550 (145)
YGP250H-2	3894 (153.3)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	2964 (6534)	550 (145)
YGP275H-2	3894 (153.3)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3029 (6678)	550 (145)

* Clearance required both sides; Weight with lube oil, no coolant, no fuel.

Sound Pressure Levels (dBA) for 200 – 275 kVA CAEU Enclosure

	50 Hz						60 Hz						
	15 m (50 ft)		7 m (23 ft)		1 m (3 ft)		15 m (50 ft)		7 m (23 ft)		1 m (3 ft)		
Generating Set Model	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	
YGP200H2	63.4	64.0	69.4	70.0	79.2	79.9	66.9	67.2	72.9	73.2	85.4	85.7	
YGP220HE2	63.6	64.2	69.6	70.2	79.3	80.4	67.0	67.4	73.0	73.4	85.4	85.8	
YGP230H2	63.7	64.3	69.7	70.3	79.4	80.7	66.9	67.4	72.9	73.4	85.4	85.8	
YGP250HE2	63.8	64.5	69.8	70.5	79.7	81.3	67.1	67.6	73.1	73.6	85.5	86.0	
YGP250H2	63.8	64.5	69.8	70.5	79.7	81.3	-	-	-	-	-	-	
YGP275HE2	64.0	64.7	70.0	70.7	80.1	82.3	-	-	-	-	-	-	
YGP220H-2	Prime	63.4	64.0	69.4	70.0	79.2	79.9	66.9	67.2	72.9	73.2	85.4	85.7
	Standby	63.6	64.2	69.6	70.2	79.3	80.4	67.0	67.4	73.0	73.4	85.4	85.8
YGP250H-2	Prime	63.7	64.3	69.7	70.3	79.4	80.7	66.0	66.7	72.0	72.7	83.5	84.2
	Standby	63.8	64.5	69.8	70.5	79.7	81.3	66.2	67.1	72.2	73.1	83.7	84.5
YGP275H-2	Prime	62.7	63.7	68.7	69.7	80.0	80.8	-	-	-	-	-	-
	Standby	63.0	64.2	69.0	70.2	80.2	81.3	-	-	-	-	-	-

Levels in accordance with European Noise Directive (2000/14/EC).

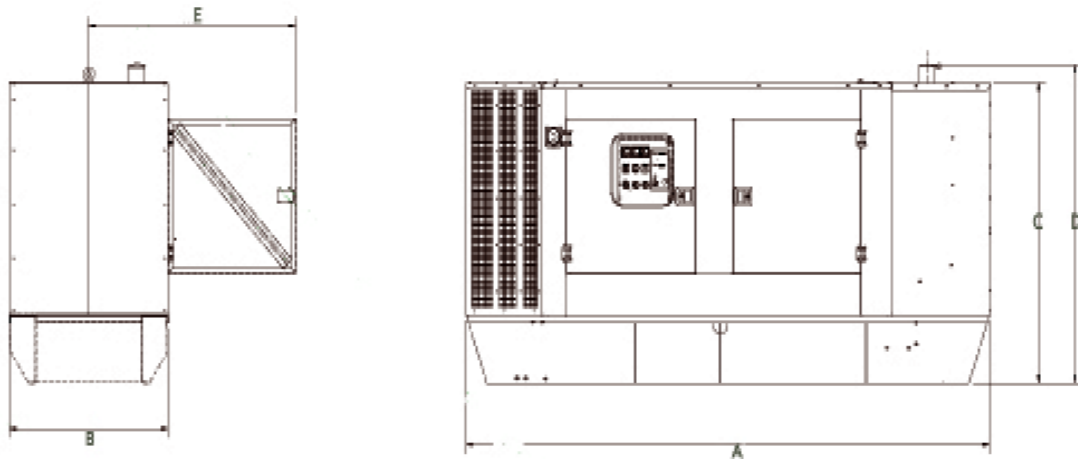

Dimensions and Weights for 200 – 275 kVA CAEU Enclosure

Generating Set Model	A: mm (in)	B: mm (in)	C: mm (in)	D: mm (in)	*E: mm (in)	Weight: kg (lb)	Fuel Capacity: l (US gal)
YGP200H2/P220HE2	4294 (169.1)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3035 (6691)	550 (145)
YGP230H2/P250HE2	4294 (169.1)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3120 (6878)	550 (145)
YGP250H2/P275HE2	4294 (169.1)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3185 (7022)	550 (145)
YGP220H	4294 (169.1)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	2970 (6548)	550 (145)
YGP250H-2	4294 (169.1)	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3055 (6735)	550 (145)
YGP275H-2	4294	1300 (51.2)	1875 (73.8)	1996 (78.6)	1700 (66.9)	3120 (6878)	550 (145)

* Clearance required both sides; Weight with lube oil, no coolant, no fuel.

YelloGen Ltd
24 Oroory Hill
Dromore
County Down
UK BT25 1LE

Please Contact:
Tel: 0044 (0) 1430-850001
Fax: 0044 (0) 1430-850002
www. Yellogen. com
E Mail: mail@yellogen. com